




VIVIX-S 1717V

Sistema de radiología Digital directo para veterinaria

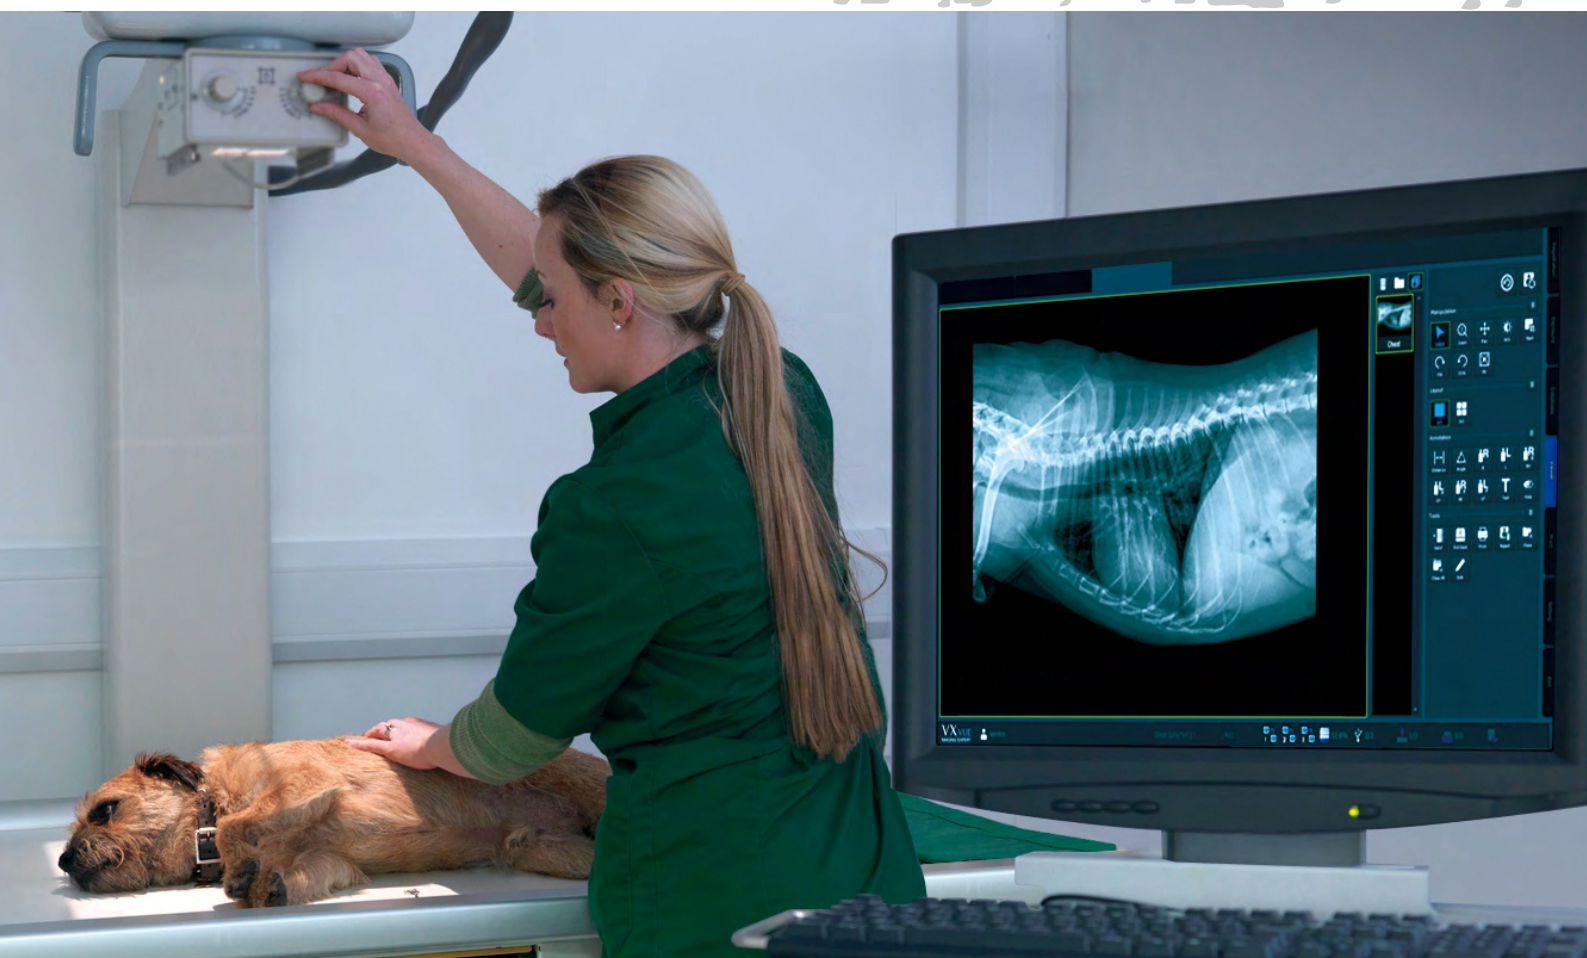

Simple solución para equipos nuevos o retrofit de existentes



Uso simple
Transportable



Gran Calidad de imagen
Baja dosis



Visualización simple
fija o móvil



Gran productividad
simple exportación

Características principales:

Medida efectiva 43 x 43 cm!!!

Tamaño de Pixel:140 micrones.

Auto detección de rayos X- funciona con cualquier equipo de RX sin necesidad de conexión ni sincronismos externos.

Tamaño de chasis, facil instalación en equipos existentes.


Sensibilidades estándar (Gadolinio) o baja dosis (Ioduro de Cesio).

Software específico para veterinaria con todas las herramientas y Conectividad DICOM, JPG, etc.

Drawing



Imágenes clínicas

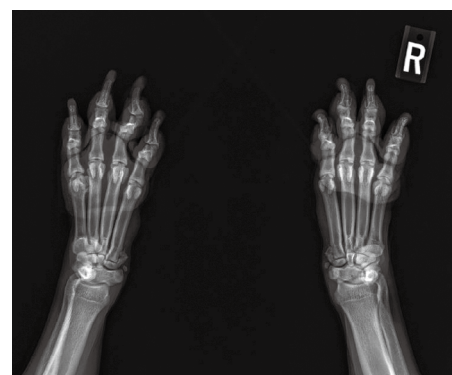

* Standalone clinical images may have been cropped to better visualize pathology.

Technical Specifications

Model Name	FXRD-1717VA	FXRD-1717VB
Technology	a-Si TFT with PIN diode	
Scintillator	CsI:TI	Gd ₂ O ₂ S:Tb
Pixel Pitch	140µm	
Spatial Resolution	0.5lp/	
Pixels	3,072 x 3,072 pixels	
Image Size	430mm x 430mm	
Grayscale	16 bit	
Energy Range	40 – 150kV	
X-ray Generator Interface	Automatic Exposure Detection, External Line Trigger	
Data Interface	Gigabit Ethernet (1000BASE-T)	
Image Acquisition Time	2 sec	
Dimensions	460mm x 460mm x 15.5mm	
Weight	4.5kg	
Operating Environment	10°C – 35°C, 30 – 85% RH (non-condensing)	

* Specifications are subject to change without prior notification.

Fabricante:

VIEWWORKS

Representante en Argentina:

RAYOS PIMAX SRL

Lascano 4431 - Buenos Aires
Argentina (C1417GZQ)
Telefax: +54114567- 1814 // 7977
rayospimax@rayospimax.com.ar
www.rayospimax.com.ar